

BRIGGS&STRATTON YOU.POWERED.

## LIQUID COOLED

**Standby Generators** 



OVERVIEW					
Brand	Briggs & Stratton®				
Model Number	080010	080011	080012	080013	080014
Rated Countries	US / Canada				
Rated AC Voltage (Volts)	120 / 240	120 / 208	120 / 240	277 / 480	347 / 600
Frequency (Hz)	60				
Generator Breaker (Amps)	500	400	350	175	150
Operating Ambient Temperature (°C / °F)	-28 - 40 / -20 - 104				
Running Amperage (Amps)	416	347	301	150	120
Running Watts <sup>1</sup> (LP / NG) (kW / kVA)	100 / 100				
Running Amperage - Continuous Duty (International Use Only) (Amps)	333	277	240	120	96
Running Watts - Continuous Duty (International Use Only) (LP / NG) (kW / kVA)	80 / 80 80 / 100				
Phase	1 3				
Engine					
Engine Brand/Manufacturer			PSI		
Model Type	5.7L Industrial Powertrain, 4-cycle				
Aspriration	Turbo Charge Air Cooled				
Speed (RPM)	1800				
Displacement (L / ci)	5.7 / 350				
Compression Ratio	9.4:1				
Rated Horsepower (gross hp)	163				
Governor Type	Electronic				
Bore & Stroke (mm / in)	101.6 x 88.4 / 4.00 x 3.48				
Number of Cylinders	8				
Cylinder Arrangement	V8				
Start Type	Automatic				

# **100** kw

#### LIQUID COOLED

Standby Generators



	080010 080011 080012 080013 080014			
Engine				
Frequency Regulation Steady State, No Load to Full Load (%)	+/- 0.5			
Frequency Regulation No Load to Full Load	Isochronous			
Air Filter Type	Dry			
Low Oil Pressure Sensor	Yes			
Low Coolant Sensor	Yes			
Engine Block Heater	Yes			
Engine - Output Deratings				
Rated Temperature (°C / °F)	25 / 77			
Rated Altitude (Above Sea Level) (m / ft)	366 / 1200			
Temperature Derate	1.5% for every 5.6°C (10°F) above rated temp			
Altitude Derate	2.5% for every 305m (1000ft) above rated altitude			
Sound Rating <sup>2</sup>				
No Load dB(A)	81			
Air Induction System				
Combustion Air (m³/min / cfm)	7.4 / 262			
Lubrication System				
Туре	Full Pressure			
Oil Capacity (L / qt)	4.7 / 5.0			
Oil Filter (Quantity / Type)	1 / Cartridge			
Cooling System				
Cooling System Type	Radiator, Closed-Loop			
Coolant Capacity (Engine Only) (L / qt)	7.8 / 8.1			
Coolant Capacity (System Total) (L / qt)	34.2 / 36.1			
Heat Rejected to Cooling Water at Rated Load (kcal/sec / BTU/min)	17.2 / 4100			
Water Pump Type	Centrifugal			
Electrical System				
Ignition System	HVS Distributor			
Battery Quantity	1			
Battery Voltage (VDC)	12			
Battery CCA (Amps)	630			
Starter Motor Voltage (VDC)	12			
Battery Charging Alternator				
Ground (Negative / Positive)	Negative			
Nominal Voltage (VDC)	12			
Maximum Amperage (Amps)	70			

### LIQUID COOLED

Standby Generators

100

kW



	080010	080011 080012 080	080014
Exhaust System			
Exhaust Manifold Type	Dry		
Exhaust Flow at Rated Load (m³/min / cfm)	24 / 846		
Exhaust Temperature at Rated Load °C / °F)	732 / 1350		
Naximum Allowable Back Pressure (kPa / in Hg)	10.2 / 3.0		
Fuel System			
Fuel Type	LP Vapor / Natural Gas		
Fuel Supply Line Inlet		11/4" NPT	
Recommended Fuel, Lower Heating Value Ninimum (MJ/m3 / BTU/ft³)	34.3 / 904		
Fuel Supply Pressure (LPV/NG: mbar / n H <sub>2</sub> O) (Liquid LP: kPa / PSI)	17-28 / 7-11		
uel Consumption <sup>3</sup>			
No Load, NG (BTU/hr)		311,000	
No Load, NG (ft³/hr)		311	
lo Load, NG (m³/hr)	8.9		
lalf Load, NG (BTU/hr)	893,000		
lalf Load, NG (ft³/hr)	893		
lalf Load, NG (m³/hr)	25.3		
Full Load, NG (BTU/hr)	1,470,000		
ull Load, NG (ft³/hr)	1,470		
Full Load, NG (m³/hr)	41.7		
No Load, LP/LPV (BTU/hr)	283,000		
No Load, LP/LPV (ft³/hr)		113	
No Load, LP/LPV (m³/hr)	3.2		
Half Load, LP/LPV (BTU/hr)	835,000		
lalf Load, LP/LPV (ft³/hr)	334		
lalf Load, LP/LPV (m³/hr)	9.5		
Full Load, LP/LPV (BTU/hr)	1,462,000		
Full Load, LP/LPV (ft³/hr)	585		
-ull Load, LP/LPV (m³/hr)		16.6	
Alternator Specifications			
Alternator Type	Brushless, 4-Lead	Brushless, 12-Lead	
Alternator Manufacturer		MeccAlte	
Alternator Model Number	ECP34-2L/4	ECP34-1L/4	ECP34-2L/4
Frequency (Hz)	60		

### LIQUID COOLED

Standby Generators

100

kW



	080010	080011 080012 080013 080014	
Alternator Specifications			
Exciter Type - Primary Alternator		Auxiliary Winding	
nsulation Rating (Class)	н		
Designed Temperature Rise (°C)	125		
Bearing (Quantity / Type)		1 / Sealed	
Coupling	Flexible Disk		
Amortisseur Windings	Full		
lumber of Poles	4		
/oltage Regulator		Digital, 1-phase Sensing	
/oltage Regulation, No Load to Full Load %)	+/- 1.0		
Dne-step Load Acceptance	100% of Rating		
Sustained Short-Circuit Current	300% of Rated Current for 20 Seconds		
Total Harmonic Distortion (THD), No Load to Full Load (%)	< 4.5	< 3.5	
Controls/Instrumentation			
Controller Manufacturer		Deep Sea	
Controller	DSE 7310 MKII		
charger	Marinco 6 Amp		
starting	2-wire		
liternator Frequency	Yes		
Real Time Clock		Yes	
ingle & 3-phase Sensing		Yes	
Accumulated Power Monitoring	Yes		
Runtime & Downtime Monitoring		Yes	
Configurable Outputs		Yes	
Configurable Inputs		Yes	
Engine Maintenance Alarms		Yes	
Engine Hour Counter		Yes	
Engine Runtime Scheduler		Yes	
event Log		Yes	
Veb-based Monitoring		Yes	
Controller Features			
leated Display Option		Yes	
rue 3-phase Generator Sensing	Single-phase	Yes	
Power Monitoring (kW, kVA, kVAR)		Yes	
Remote Communications RS232 & RS485) Capable		Yes	

## **100** kw

### LIQUID COOLED

Standby Generators



	080010 080011 080012 080013 080014
Controller Features	
Configurable Inputs / Outputs	Yes
CAN Sensing	Yes
Configurable Display Languages	Yes
Power Save Mode	Yes
Integral PLC Editor	Yes
Flexible Sender Inputs	Yes
DSE Configuration Suite PC Software	Yes
Configurable Event Log (250)	Yes
Load Switching, Load Shedding & Dummy Load Outputs	Yes
Other Features	
Alternator Protection	Yes
Battery Rack and Cables	Yes
Battery	Yes
Electronic, Isochronous Governor	Yes
Gas Fuel System	Yes
Integral Vibration Isolation	Yes
Operation and Installation Manual(s)	Yes
Steel Sound Enclosure	Yes
Accessories	
Liquid Propane Vaporizer Kits	6504-01
Battery Charger, 9461-02	6463-00
Controller Remote Communication Module, DSE 890-01	6464-00
Remote Annunciator, DSE 2548-01	6465-00
Remote Display, DSE 2510-32	6466-00
Emergency Stop Switch, NEMA 4X	6360-00
Emergency Stop Switch, w/ Cover	6361-00
Battery Warmer	6343-00
Battery Cable Lockout	6335-00
Engine Communication Cable	6350-00
AVR Communication Cable	6472-00
Controller Communication Cable, USB-A to USB-B	6428-00
Remote Annunciator Kit, DSE 2548-01	6468-00

## LIQUID COOLED

100


kW


**Standby Generators** 



#### SPECIFICATIONS

	080010 080011 080012 080013 080014				
Limited Warranty <sup>4</sup>					
Warranty: Generator, Domestic (Parts / Labor / Travel) (Years)	3				
Warranty: Generator, International (Parts / Labor / Travel) (Years / Hours)	3 / 1000				
Warranty: Engine, Domestic (Parts / Labor / Travel) (Years)	3				
Warranty: Engine, International (Parts / Labor / Travel) (Years / Hours)	3 / 1000				
Warranty: Enclosure, Surface Rust and Corrosion (Parts / Labor / Travel) (Years)	1				
Warranty: Enclosure, Rust Through (Parts / Labor / Travel) (Years)	2				
Certifications					
UL	Yes				
cUL	Yes				
Weights & Dimensions					
Assembled Dimensions (Length x Width x Height) (in / mm)	120 x 52 x 86 / 3048 x 1321 x 2184				
Assembled Weight (lbs / kg)	4125 / 1871				
Packaged Dimensions (Length x Width x Height) (in / mm)	127 x 58 x 92 / 3226 x 1473 x 2337				
Packaged Weight (lbs / kg)	4295 / 1948				

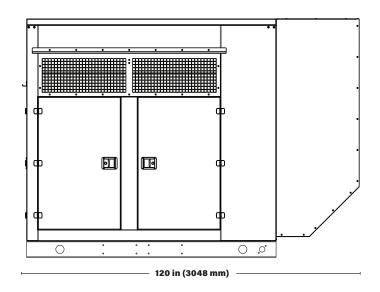

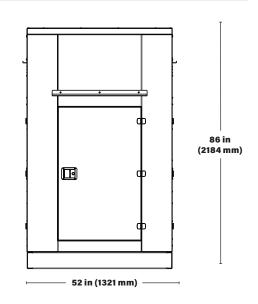

<sup>1</sup> This generator is listed in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

<sup>2</sup> Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.

<sup>3</sup> Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances — fuel flow rates may vary depending on these factors.

<sup>4</sup> See operator's manual or BRIGGSandSTRATTON.com for complete warranty details.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice This standby generator is not for Prime Power applications.

Please visit BRIGGSandSTRATTON.com for the latest information. BS1379 - 4/22 ISTED

BRIGGS & STRATTON POST OFFICE BOX 702